



## MTS SilentFlo™ 515.04 Hydraulic Power Unit

Single-station support for low-flow applications

### Compatible with:

- » Model 370.02
- » Model 370.10

Buying more hydraulic power than necessary will add to operational costs throughout the entire lifecycle of a hydraulic power unit. By contrast, right-sizing to meet your application needs will not only reduce daily operational costs, it will also save energy, and allow your load frame to run more efficiently.

The MTS SilentFlo 515.04 was specifically designed for use with a single MTS Landmark® or Bionix® load frame. For systems with a force range of 1-25kN and a need for a maximum average 4 gpm flow rate, this HPU provides all the benefits of proven SilentFlo technology at a fraction of the cost.

This compact unit can be placed in close proximity to your testing workspace because it is extremely quiet with a 57 dB(A), which is similar to the noise level of a household dishwasher and quieter than normal conversation. In addition, features such as tuned tubes reduce the outlet ripple noise, which improves test data accuracy.

The small size requires less power and hydraulic fluid to operate, and the cooling circuits save energy by requiring less power to cool as well. For single load frames, this small, energy-efficient HPU is the ideal choice for reliable hydraulic power generation.

be certain.

## Model 515.04 Specifications

Operating pressure: 210 bar (3,000 psi)

Pump type: Variable displacement pump


Filtration: Full flow on the return side

Maximum ambient operating temperature: 40°C (104°F)

Minimum ambient operating temperature: 5°C (40°F)



Easy-to-use control panel

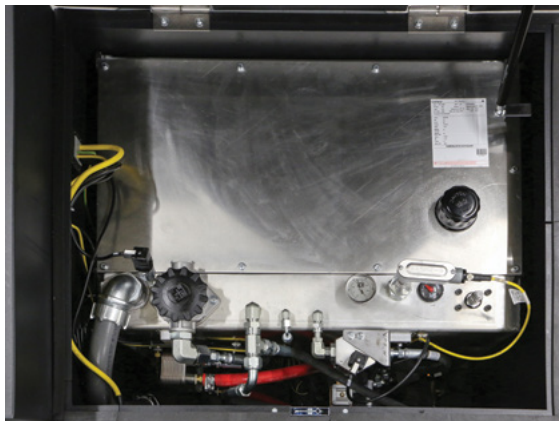

Energy-efficient and clean filtration system

## Model 515.04

Flow rate	15.1 lpm (4 gpm)
Noise level*	57 dB(A)
Reservoir capacity ( <i>maximum</i> )	223 L (59 gal)
Unit dimensions	
Width	77.0 cm (30.3 in)
Height	116.0 cm (45.7 in)
Length	114.3 cm (45.0 in)
Weight with maximum oil	508 kg (1,120 lb)
Motor size	11 kW (15 hp)

\* Sound levels [57 dB(A)] are expressed as a free field value. Readings may vary with acoustic environment.

Specifications subject to change without notice. Please contact MTS for specifications critical to your application.



MTS Landmark 370.10 Load Frame



### MTS Systems Corporation

14000 Technology Drive  
Eden Prairie, MN 55344-2290 USA

Telephone: 1-952-937-4000

Toll Free: 1-800-328-2255

Fax: 1-952-937-4515

E-mail: [info@mts.com](mailto:info@mts.com)

[www.mts.com](http://www.mts.com)

ISO 9001 Certified QMS

MTS, MTS Landmark and Bionix are registered trademarks and SilentFlo is a trademark of MTS Systems Corporation. These trademarks may be protected in other countries. RTM No. 211177.

© 2018 MTS Systems Corporation.

100-406-609 SilentFlo515.04HPU • Printed in U.S.A. • 5/18